# Technical Site Visit Report

Prepared for: CD Prabhakar Reddy_Lepakshi Farm Land_35.67kWp_Optimizer

## PROJECT INFORMATION

| | |
|---|---|
| Report Number | ESV-2026-0198 |
| Project ID | B83CC285 |
| Project Name | CD Prabhakar Reddy_Lepakshi Farm Land_35.67kWp_Optimizer |
| Project Sector | Residential |
| Project Type | Without Subsidy |
| Sales Lead | Harsha Kuntur |
| Site Address | Transit Surveys, No. 54, 2nd Main Road, Vyalikaval, Palace Guttahalli, Bengaluru, Karnataka, 560003, India. |
| GPS Coordinates | 13.75278, 77.620599 |
| Google Maps | https://www.google.com/maps?q=13.75278,77.620599 |
| Visit Date | 2026-08-31 |
| Visited By | ABILASH N K |
| Revision | Rev 1 |

## CLIENT INFORMATION

| | |
|---|---|
| Client Name | C D Prabhakar Reddy |
| Contact | 8971540000 |

## PROJECT DETAILS

| | |
|---|---|
| Solar Rooftop System Type | On-Grid |
| System Capacity (kWp) | 35.67 |
| Sanction Load (kW) | 63 |
| Module Make & Capacity | Waaree Non DCR Topcon,  615 Wp |
| Module Length (mm) | 2382 |

| | |
|---|---|
| Module Width (mm) | 1134 |
| Number of Panels | 58 |
| Inverter Type | SolarEdge |
| Inverter Brand | SolarEdge - 33.3 KW, 3 Ph |
| Number of Inverters | 1 |
| Number of Optimizers | 29 |
| Mounting Structure Type | Elevated |

## SITE INSPECTION CHECKLIST

### General

| # | Question | Answer | Notes |
|---|---|---|---|
| 1 | Can the delivery van/truck reach the material unloading point? | Yes | - |
| 2 | Are there any obstacles at the site that could hinder material lifting? | **No** | - |
| 3 | Where will the Inverter, DCDB, ACDB, Battery, etc. be located? | All accessories can be located inside the nearby shed allocated as the inverter room (where a 70 kW battery-based solar inverter and related accessories exists). | - |
| 4 | Is a canopy required for protecting the Inverters/ACDB/DCDB? | **No** | - |
| 5 | Did you discuss the location of the earth pits with the customer? | Yes, discussed with the site-in-charge and finalised the location for earthing. | - |
| 6 | Where is the Internet Router located? | The router is available inside the inverter room shed. | - |
| 7 | What's the Wi-Fi strength of the router near to the String inverter/Envoy? | 3 bars | - |
| 8 | Did you pin the site location in your WhatsApp when you were at the site? | Yes | - |

### Roof Details

| # | Question | Answer | Notes |
|---|---|---|---|
| 1 | What type of roof is present at the site? | Other | *Ground-mounted system.* |
| 2 | Are there any obstructions on the roof that could affect the solar installation? | **No** | - |

| # | Question | Answer | Notes |
|---|---|---|---|
| 3 | What is the angle of the panels? (in degrees) | 10 | - |
| 4 | In case of sloped roof, what is the slope angle of the roof? (in degrees) | N/A | - |
| 5 | On how many roofs at the site are we installing solar? | N/A | - |
| 6 | If it is a Tiled roof, what is underneath the tiles? | N/A | - |
| 7 | If it is a Tiled roof with MS or Wooden rafters, is it Single-tiled or Double-tiled? | N/A | - |
| 8 | What type of mounting structure is planned? | Other | *EcoSoch Ground mounted (Ground Mount HDGI with Galvalume)* |
| 9 | What is the orientation of the solar panels? | ["South"] | - |
| 10 | How can the roof be accessed? | Other | *Direct walkable access is available to the farmland.* |
| 11 | Is the building currently under construction? | N/A | - |
| 12 | In an under-construction building, are existing conduit pipes available for AC, DC cables, and earthing? | N/A | - |
| 13 | What is the height of the building and how many floors does it have? | N/A | - |
| 14 | Is the site photo matching with the building description? | N/A | - |
| 15 | Is there an overhead HT line passing within a 10-meter radius of the site? | **No** | - |

## Residential / Electrical

| # | Question | Answer | Notes |
|---|---|---|---|
| 1 | What type of energy meter is currently installed? | Phase: Three Phase, Type: Digital, If 3-phase: LT w/o CT (5 - 34.999) | *The main meter box is sealed and not accessible or visible.* |
| 2 | Is the Meter cubicle photo matching with the previous answer? | Yes | *The main meter box is sealed and not accessible or visible.* |
| 3 | Has the termination point in the Main meter panel been identified? | details: There exists a termination box nearby, which has the parallel connection from the main meter. The cables from the solar meter can be terminated here. | - |
| 4 | Is the Termination Point easily visible or sealed? | Visible | *There exists a termination box nearby, which has the parallel connection from the main meter. The cables from the solar meter can be terminated here.* |
| 5 | Is a Lightning Arrestor (LA) already available at the site? | Yes | - |
| 6 | Is space available for CT within Energy meter panel? | N/A | - |
| 7 | In case of an Enphase system, is the distance between the farthest micro-inverter and IQ Gateway > 50m? | N/A | - |

| # | Question | Answer | Notes |
|---|---|---|---|
| 8 | Provide details of the existing CT ratings (if applicable). | N/A | - |
| 9 | In Main meter panel, is empty space available for solar meter? | **No** | *The solar meter provision has to be fabricated near the termination point located adjacent to the main meter box.* |
| 10 | In Main meter panel, is empty space available to house the Enphase accessories or ACDB components? | N/A | - |
| 11 | Is there space available to dig DC, AC and LA earth pits? | Yes | *The earthing pits can be dug at the space available around the inverter room shed allocated.* |
| 12 | In case of elevated structures, is an LA extension provided at the far end? | N/A | - |
| 13 | In case of elevated structures, is it with or without grouting? | N/A | - |
| 14 | Are there any challenges with respect to Installation and Maintenance activities? | details: Because of the rough terrain beneath, piling of the footposts can be challenging. However, in order to meet the need, the client is willing to provide support and machinery. | - |
| 15 | Are there any safety risks associated with accessing the roof for installation? | **No** | - |
| 16 | Is space present in rooftop to store the panels? | N/A | - |
| 17 | In case of sloped roof MS structure, provide the dimension of rafter to rafter, purlin to purlin. | N/A | - |
| 18 | Is ventilation available in the battery location? | N/A | - |
| 19 | Should the Inverters/ACDB/DCDB be installed on a metal grill or wall mount? | All of the accessories must be installed on a metal grill that will be built within the shed designated for solar power. | - |
| 20 | Provide the dimensions for solar meter cubicle placement (L x W of wall). | length: 800, width: 600 | - |
| 21 | Provide the dimension for earth pits location (L x W of available space). | length: 5000, width: 2000 | - |
| 22 | Is LAN cable under customer scope? | Yes | - |
| 23 | Is there any shadow that affects the solar installation? | **No** | - |
| 24 | Is there any trench work to be done to carry the AC cable to the meter location? | details: A trench must be excavated in order to carry the DC wires from the intended location to the inverter-room shed. | - |

# PHOTO DOCUMENTATION

## Cable Routing Legend

| Legend | Description |
| --- | --- |
| | Proposed PV Module Array |
| | Main Meter Location |
| | Solar Meter |
| | Battery |
| | Inverter |
| | Other Equipment |
| | DC Cable |
| | AC Cable |
| | Material Shifting |
| | DC Earthing Cable |
| | AC Earthing Cable |
| | LA Cable |
| | DC Earth Pit |
| | AC Earth Pit |
| | LA Pit |
| | LA |

## Site- Exterior view

## Site Layout - Top View

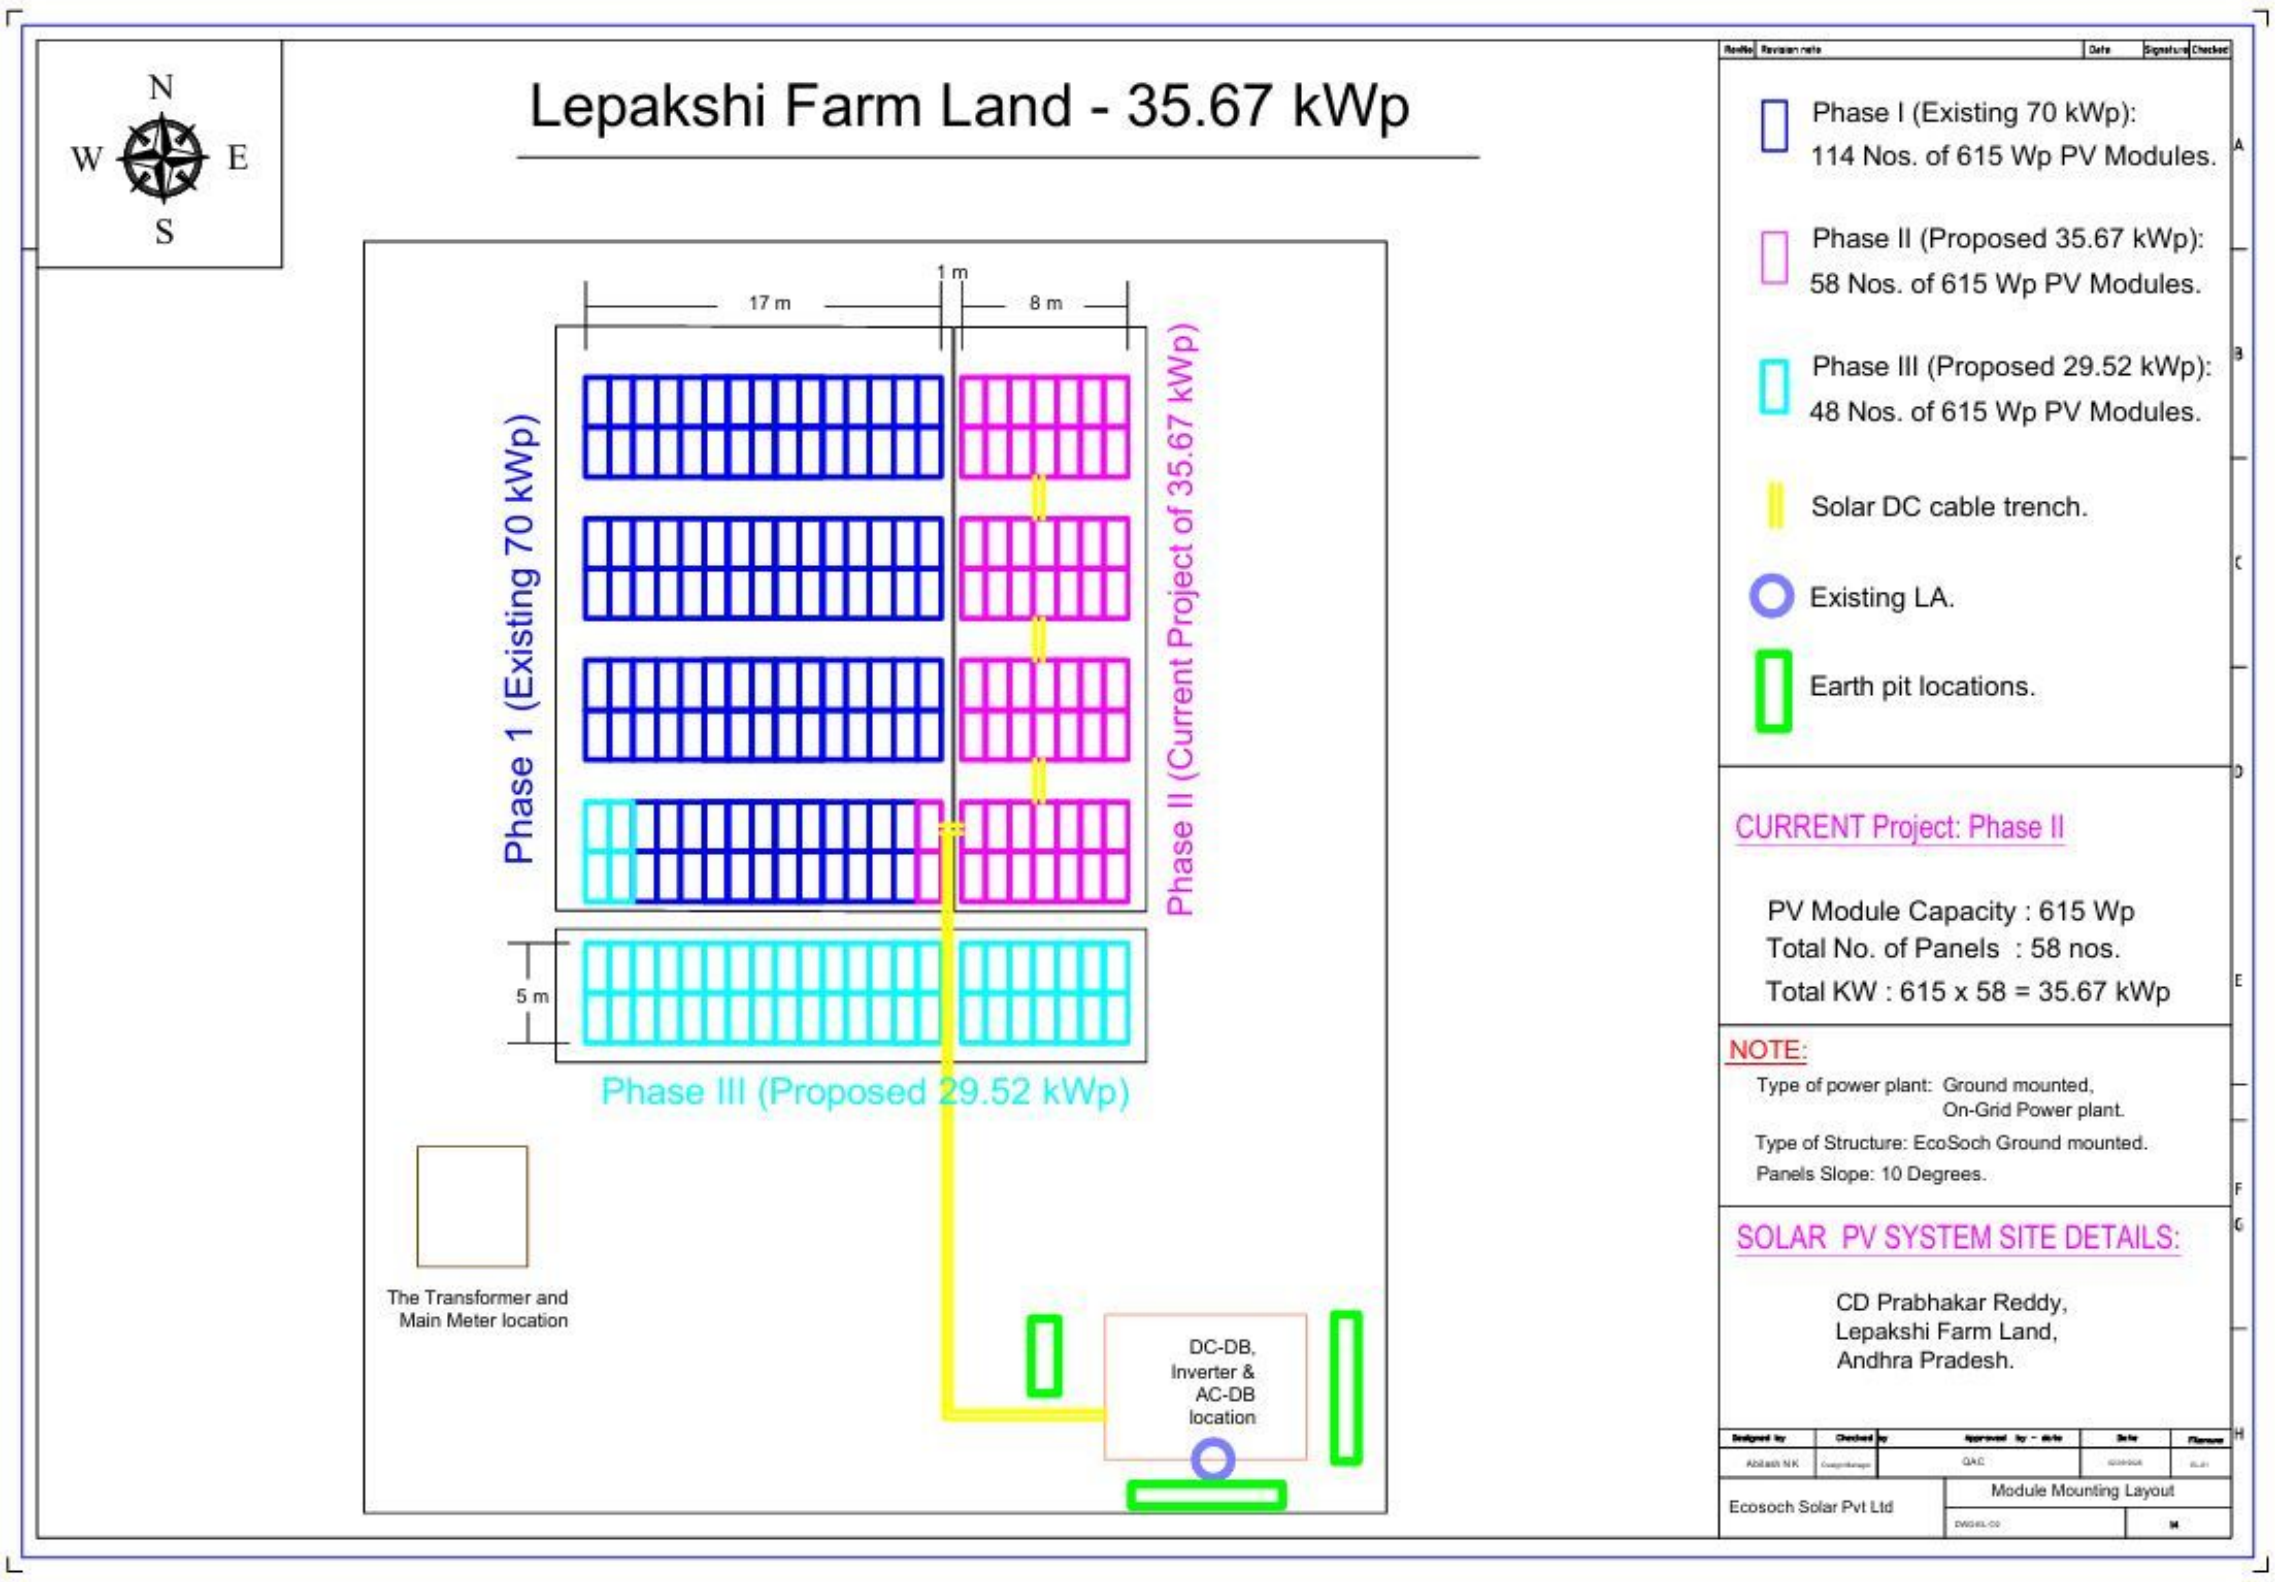


## Material Delivery Route

*The materials can be delivered to the site via the mud road reaching the inverter room shed allocated for the solar installation.*

# Material Storage

*The materials can be store inside the inverter room shed allocated at the site. The near by sheds too can be used to store the panels.*

# Proposed PV Area


## Cable Routing

## Equipment Location


## Meter Box

*The 63 KVA transformer, EB meter and the termination box*


*Main meter which is sealed by the EB authorities*

*Termination box available nearby with a parallel connection from the main meter.*

# OBSERVATIONS & RECOMMENDATIONS

## EcoSoch Scope

| # | Observation |
|---|---|
| 1 | Installation and commissioning of 35.67 kWp, On-grid solar power plant at the proposed premises. |
| 2 | The co-ordination and follow-up with DISCOM regarding solar connectivity till commissioning. |

## Customer Scope

| # | Observation |
|---|---|
| 1 | Providing an active Wi-Fi or LAN cable connection up to the inverter location. |
| 2 | Providing support for the civil and excavation works related to solar structure erection. |

## THANK YOU

Dear C D Prabhakar Reddy,

Thank you for choosing EcoSoch Solar for your solar installation. We appreciate your trust in us and your commitment to sustainable energy. Our team is dedicated to ensuring a seamless installation experience and long-term performance of your solar system.

Should you have any questions or require further assistance, please do not hesitate to reach out to us.

Warm Regards,
**Team EcoSoch**

### & Did You Know?

The Sun burns 600 million tonnes of hydrogen per second — and your panels get a share.

**EcoSoch Solar Pvt. Ltd.**

#940, Sha Arcade, 2nd Phase, NTI Layout, Kodigehalli, Bengaluru 560097

www.ecosoch.com | info@ecosoch.com